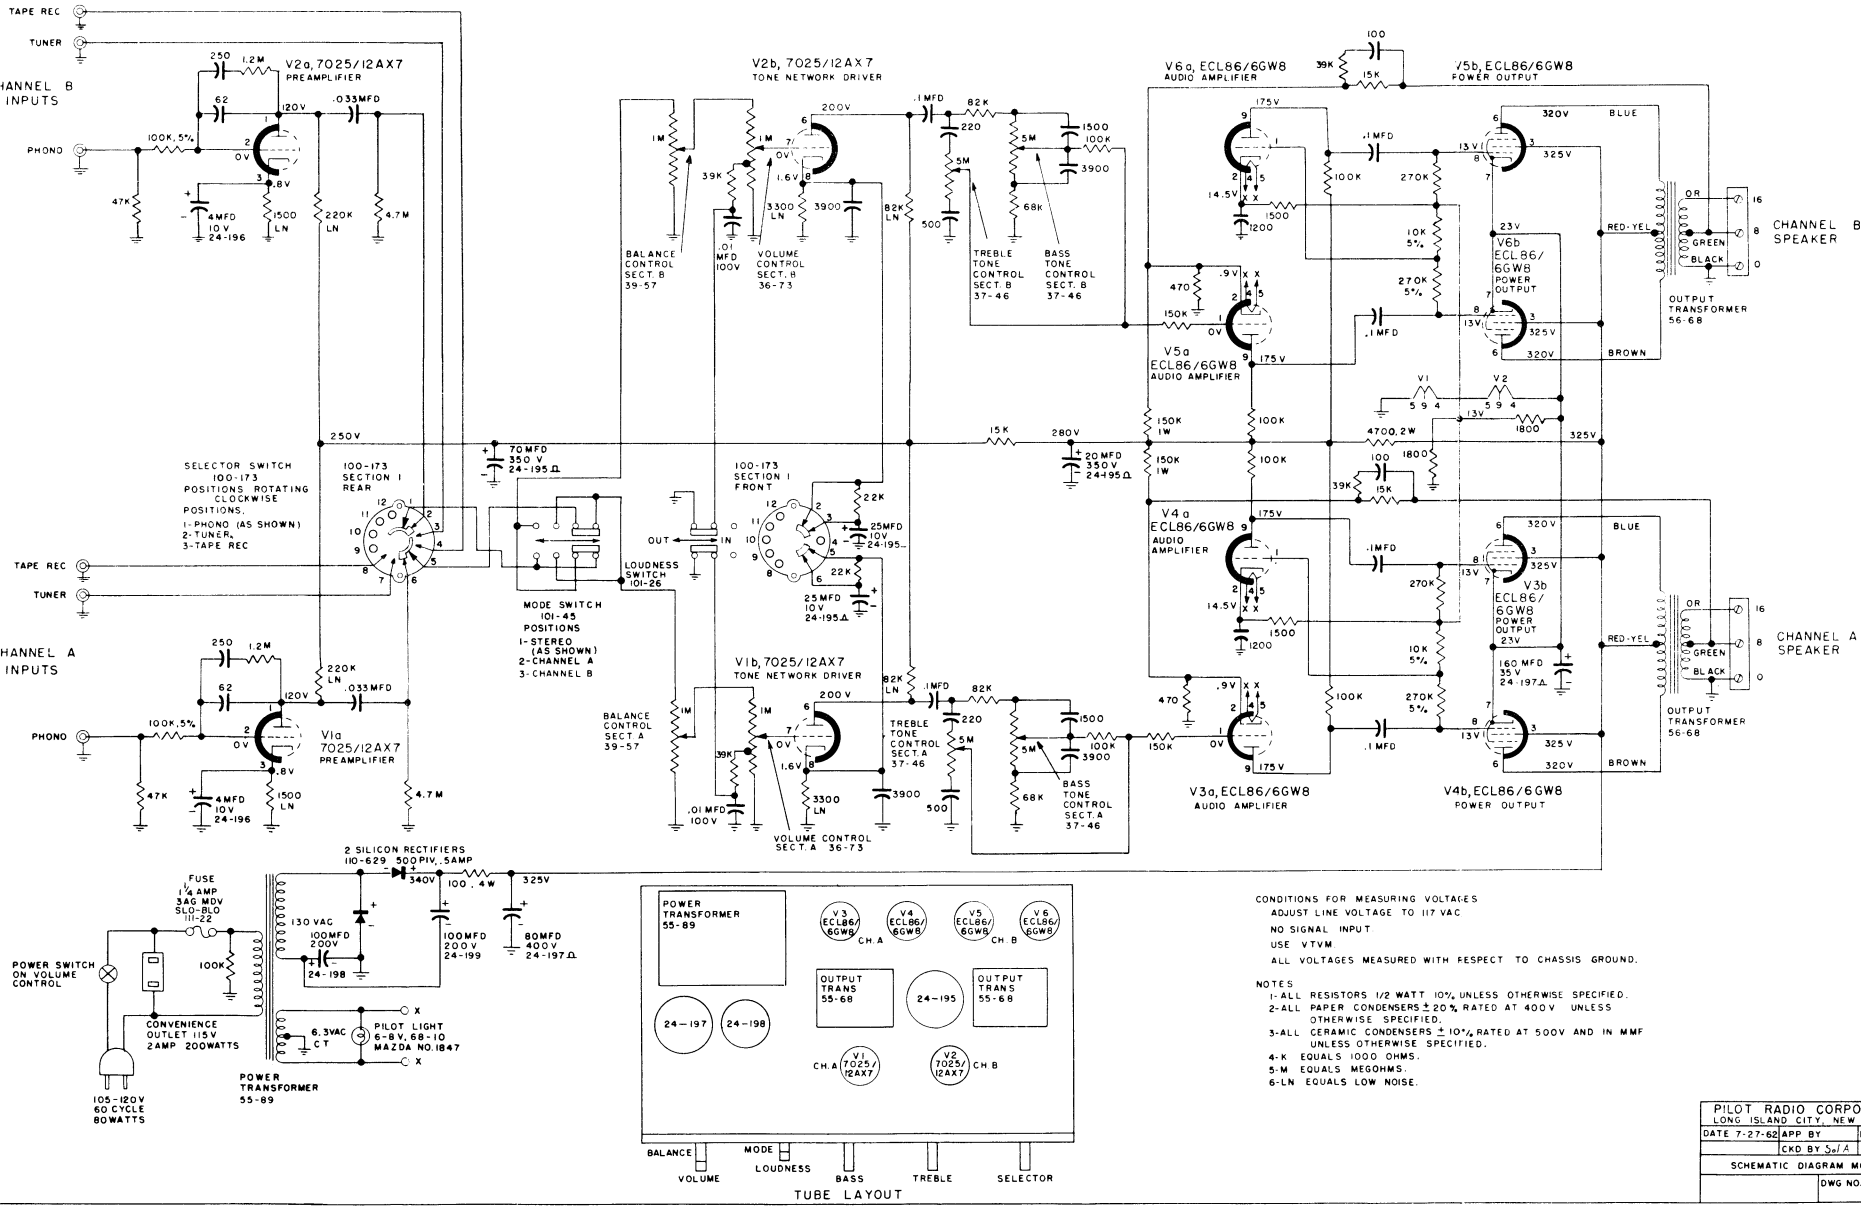

CONDITIONS FOR MEASURING VOLTAGES
ADJUST LINE VOLTAGE TO 117 VAC
NO SIGNAL INPUT
USE VTVM.
ALL VOLTAGES MEASURED WITH RESPECT TO CHASSIS GROUND.

NOTES
1-ALL RESISTORS 1/2 WATT 10% UNLESS OTHERWISE SPECIFIED.
2-ALL PAPER CONDENSERS ± 20% RATED AT 400V UNLESS OTHERWISE SPECIFIED.
3-ALL CERAMIC CONDENSERS ± 10% RATED AT 500V AND IN MMF UNLESS OTHERWISE SPECIFIED.
4-K EQUALS 1000 OHMS.
5-M EQUALS MEGOHMS.
6-LN EQUALS LOW NOISE.

PILOT RADIO CORPORATION
LONG ISLAND CITY, NEW YORK, U.S.A.

DATE 7-27-62	APP. BY	DWN BY HBA
	CKD. BY S.o/A	

SCHEMATIC DIAGRAM MODEL 230

DWG NO. 90-241